
Polymer Works, Hope Street Dudley, West Midlands DY2 8RS

t: 01384 252555 f: 01384 252373 e: technical@advancedseals.co.uk

Test

Specification Sheet / 01 A341 33 FR Closed Cell Cross-Linked **Polyethylene Foam Block**

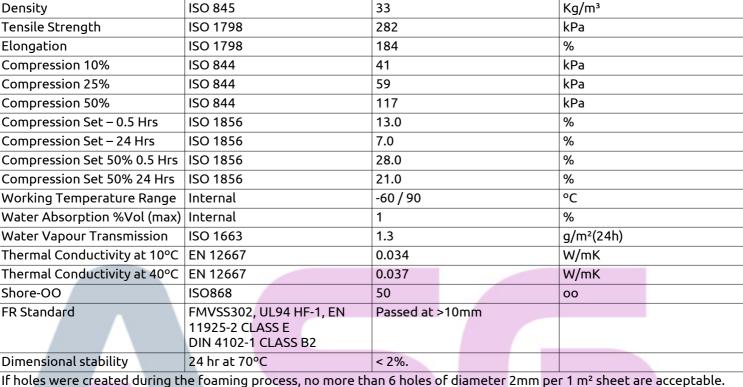

Standard Value

Tolerances other than the above may be negotiated.

Compliant with

Description

RoHS 2, RoHS 3, and REACH

Conflict Mineral Reporting Template (CMRT)

Average values taken from center of the block. Dimensional Stability 24hr at 70°C < 2% Dimensional Stability 24hr at 90°C < 5% Additional data available upon request. MSDS available upon request. This information on A341 33 FR is presented to the best of our knowledge. Data represents typical values measured on a 10 thick specimen and should be considered a guideline only.

Disclaimer: the material declaration provided to you is accurate to the best of our knowledge. We have made every effort to ensure the accuracy and the reliability of this information. We cannot, however, guarantee this date's full accuracy or completeness. We are not responsible for any error or omissions in the materila declaration. We are also not responsible for any future damages that may result from any inappropriate use of this material.

Change Control Date	Change
02/08/2013	Created
08/11/2023	Last Updated



The above figures are average values.

We recommend that you examine any material you select to ensure its suitability for your application. Tolerance(s) applied in accordance with ASG specification No WI007 (https://bit.ly/3nKm6Hj) unless otherwise stated. Our standard terms and conditions of trading (https://bit.ly/3b3mThw) apply at all times.





http://www.advancedseals.co.uk

Unit

Certificate No. 11738-EMS-00 ISO 9001:2015 ISO 14001:201